



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : H04M 3/42, 3/54	A1	(11) International Publication Number: WO 00/59188 (43) International Publication Date: 5 October 2000 (05.10.00)
----------------------------------------------------------------------------	----	----------------------------------------------------------------------------------------------------------------------

(21) International Application Number: PCT/GB00/00818

(22) International Filing Date: 7 March 2000 (07.03.00)

## (30) Priority Data:

9907466.8	31 March 1999 (31.03.99)	GB
99305541.7	13 July 1999 (13.07.99)	EP

(71) Applicant (for all designated States except US): BRITISH TELECOMMUNICATIONS PUBLIC LIMITED COMPANY [GB/GB]; 81 Newgate Street, London EC1A 7AJ (GB).

## (72) Inventors; and

(75) Inventors/Applicants (for US only): FENTON, Christopher, John [GB/GB]; 1 Belgrave Close, Ipswich IP4 2TT (GB). LYLE, John, Andrew [GB/GB]; 48 Kelvedon Drive, Ipswich, Suffolk IP4 5LQ (GB). CLAPTON, Alan, James [GB/GB]; 11 Winding Piece, Capel St. Mary, Suffolk IP4 5LQ (GB).


(74) Agent: LIDBETTER, Timothy, Guy, Edwin; BT Group Legal Services, Intellectual Property Department, 8th floor, Holborn Centre, London EC1N 2TE (GB).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

## Published

With international search report.

(54) Title: MOBILITY MANAGEMENT

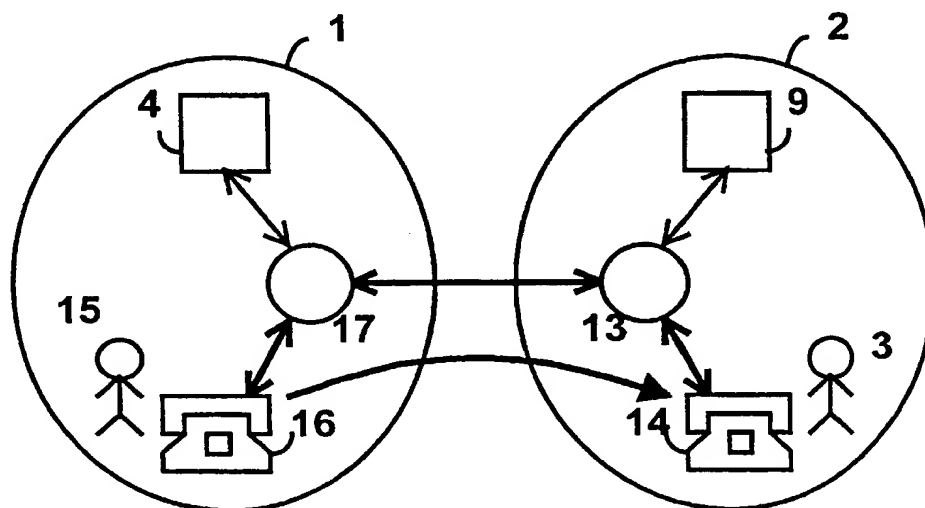

## (57) Abstract

A user (3) is registered to use telecommunications services provided by a home service provider in a wired home network (1). When he travels abroad, the user (3) may also be provided with telecommunications services by another service provider operating in a visited network (2). The user (3) "attaches" himself to the visited network (2) which includes nominating a telephone (14) to which calls made to a user's personal number may be forwarded. The user (3) is also assigned a prefix number which enables him to make calls from any phone in the visited network (2).

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## Mobility Management

The present invention relates to mobility management within a communications system.

The re-directing of a call to a user-specified telephone, whether fixed or mobile, is known as call-forwarding. Call-forwarding is especially useful when trying to contact a user who is  
5 on the move in a fixed telephone network, where telephones, rather than people, are ascribed numbers. In one example, the user is given a "personal" telephone number. The user directs the network to forward all calls made to the personal number to a particular fixed telephone (the "borrowed" telephone). When the user moves, the user instructs the network to forward calls to a new fixed telephone. An example of a call-forwarding service  
10 in the United Kingdom is British Telecommunications plc's Flexinumber™ service. Not only can this service be used to forward calls within the UK, but it can be used to forward calls to another network located in another country such as the United States of America.

However, personal numbering has several limitations. Firstly, the personal number can only be used to receive calls. The user must make other arrangements if he wishes to make  
15 calls and does not want to burden the owner of the "borrowed" telephone with the cost of his calls. To provide full mobility, the personal number must allow the user to make calls from a "borrowed" telephone and for the calls to be charged to the personal number account. Secondly, the user is always tied to his home network. The user may, temporarily, want to use the services provided by a foreign service provider, in a foreign network, as if  
20 he were a subscriber to the foreign service provider.

According to the present invention, there is provided a method of providing a user of a home network with use of a visited network, the method comprising registering the user with the visited network, including supplying a visitor node which is located in the visited network with the identity of a user-selected terminal and a first identification number for  
5 identifying the user and a home node which is located in the home network, and registering the visitor node as a proxy with the home node so as to allow routing by the home node of a call intended for the user to the user-selected terminal.

The visitor node may comprise a visitor switching means and a visitor location database.

The user-selected terminal may be assigned a temporary routing number.

10 The method may further provide a further user of the home network with use of the visited network and a call intended for the further user may be routed to the user-selected terminal.

The visited network may be a public switched telephone network and the method may include supplying a visitor node with the identity of a user-selected terminal comprising  
15 providing the telephone number of a terminal attached to the visited network.

The method may further comprise supplying the user with a second identification number for enabling the user to use the visited network and for enabling the visitor node to record the use of the visited network by the user.

20 The enabling the user to use the visited network may comprise the user dialling the second identification number and a destination terminal number for making a call to the destination terminal.

The recorded use of the visited network is supplied to the home node for the purposes of billing.

25 According to the present invention there is also provided a method of configuring a home network to provide a user of the home network, who is assigned a user number, use of a

visited network, the method comprising receiving from a visitor node located in the foreign network, its identity, storing and associating the identity of the visitor node with the user number and receiving billing data from the visitor node for the charging the user.

5 According to the present invention there is further provided a method of configuring a visitor node to provide a user of a home network use of a visited network in which the visited node is located, the method comprising receiving an identification number for identifying the user and a home node which is located in the home network, requesting and receiving confirmation of registration with the home node and sending to the home node billing data arising from the user's use of the visited network.

10 According to the present invention there is further provided apparatus for providing a user of a home network with use of a visited network, comprising a visited network and a home network, a user-selected terminal connected to the visited network; means for registering the user with the visited network, a visitor node located in the visited network, means for supplying the visitor node with the identity of the user-selected terminal and a first  
15 identification number for identifying the user; a home node located in the home network, and means for registering the visitor node as a proxy with the home node so as to allow routing by the home node of a call intended for the user to the user-selected terminal.

According to the present invention there is further provided a telephone network configurable as a home network to provide a user of the home network, who is assigned a  
20 user number, use of a visited network, the network comprising means for receiving, from a visitor node located in another network, its identity; means for storing and associating the identity of the visitor node with the user number; and means for receiving billing data from the visitor node for charging the user.

25 According to the present invention there is further provided a node in a telephone network configurable as a visited node to provide a user of another, home, network use of the network in which the visited node is located, the node comprising means for receiving an identification number for identifying the user and a home node located in the home network, means for requesting and receiving confirmation of registration with the home

node and means for sending to the home node billing data arising from the user's use of the visited network.

An embodiment of the present invention will now be described, by way of example, with reference to the accompanying drawings, in which:-

- 5 Figure 1 is a schematic diagram of a communications system comprising a home and a visited network and a process by which a user "attaches" himself to the visited network;
- Figure 2 is a schematic diagram of the internal structure of a home node;
- Figure 3 is a schematic diagram of the internal structure of a visitor node;
- Figure 4 is a process flow diagram of a user attaching to a visited network;
- 10 Figure 5 is a schematic diagram of a user-terminated call process;
- Figure 6 is a schematic diagram of a user-originated call process;
- Figure 7 is a schematic diagram of a user detaching from a visited network and
- Figure 8 is a process flow diagram of a user detaching from a visited network.

Referring to Figure 1, a communications system comprises a home network 1 and a visited  
15 network 2. In this example, both networks are public switched telephone networks (PSTNs). A user 3 is registered with a home service provider which provides services through the home network 1. In this example, the home service provider is the same the network operator, for instance British Telecommunications plc, though this need not be the case. In this example, the service provider provides a voice service to the user 3. The  
20 user 3 is also assigned a personal number for call forwarding.

The home service provider has a home node 4, located within the home network 1.  
Referring to Figure 2, the home node 4 comprises a reference profile register 5 which holds subscription details for subscribers registered to use services, billing data and data relating to foreign networks. The home node 4 also comprises a home gateway switching centre 6  
25 to provide routing access to the home network 1 and an authentication centre 7 to validate the authenticity of users. Other service providers may also have home nodes of their own or may share. The home network 1 also comprises a first home network exchange 8, which is one of a plurality of exchanges distributed throughout the home network 1.

- The visited service provider has a visitor node 9 located in the visited network 2. Referring to Figure 3, the visitor node 9 comprises a current profile register 10 which temporarily holds subscription details for subscribers who are registered to use services provided by another service provider, in this case a service provider operating in the home network 1.
- 5 The visitor node 9 also comprises a visitor gateway switching centre 11 to provide routing access to the visited network 2. Other service providers using the visited network 2 may also have visitor nodes of their own. The visited network 2 also comprises a first visited network exchange 13, which is one of a plurality of exchanges distributed throughout the visited network 2.
- 10 Typically, the home node 4 and the visitor node 9 are similar. Each has a dual purpose: to operate as a home node with respect to users registered with the home service provider and to operate as a visitor node with respect to users registered with another service provider. Therefore, the visitor node 9 also comprises a second Authentication centre 12.

- The functionality of the home node 4 and the visitor node 9 can be implemented in
- 15 network service control point running on a Unix platform.

- In order to explain operation of the network configuration, an example will be described in which the user 3 visits the United States and wishes to be provided with telecommunications services. In this example, the visited network 2 is in a foreign country, the United States, although the home network 1 and the visited network 2 may operate
- 20 within the same country or region. In addition to simple voice telephone services, the user 3 wishes to be provided with add-on services, not available in the home network 1, such as a sports results service. To be provided with telecommunications services through the visited network provider, the user 3 registers with the visited network 2. The result of registration is that the user 3, becomes "attached" to the visited network 2, thus enabling
- 25 the user 3 to make full use of services provided by the visited service provider and have calls routed from the home network 1 to the visited network 2.

The process by which the user 3 registers with the foreign service provider will now be described.

Referring also to Figure 4, a user 3 dials a universal access number on a telephone 14 located in the visited network 2 (Step S1). This number is recognised by the first visited network exchange 13 and routed to the visitor node 9 (as shown by arrow A) (Step S2). The visitor node 9 prompts the user 3 for information using pre-recorded or synthesised voice messages.

The visitor node 9 enquires whether the user wants to "attach" to or "detach" from the visited network 2 by entering "1" or "3" respectively (Step S3). The user enters "1" on the touch-tone pad of the telephone 14, to indicate that he wishes to "attach" himself to the visited network 2 (Step S4).

10 The visitor node 9 asks for the number of the telephone to which calls made to the user's personal number should be re-routed (Step S5). There are several options. The user 3 may press the "star" key on the telephone 14 to indicate that calls should be forwarded to the telephone he is using. Alternatively, the user 3 may enter the number of another telephone which may be a fixed telephone or a mobile number. The user 3 may also enter "star" and  
15 an extension number if the phone is part of a private branch exchange (PBX) (Step S6).

The visitor node 9 prompts the user 3 to enter the period during which calls are to be forwarded to the selected telephone (Step S7). The user 3 selects a time unit of hours, days or indefinitely, by entering "1", "2" or "0" respectively and the integer number of time units required. For example, if the user wants calls to be forwarded to the selected  
20 telephone 14 for 3 days, he enters "2" and then "3" (Step S8).

The visitor node 9 prompts the user 3 for a personal identification number (PIN). The user 3 enters his PIN using the touch-tone pad of the telephone 14 (Steps S9, S10).

The visitor node 9 then proceeds to register itself as a proxy node with the home node 4. The visitor node 9 obtains the location of the home node 4 from the user's PIN and sends  
25 a proxy registration request to the authentication centre 7 located in the home node 4 (as shown by arrow B) (Steps S11, S12). The authentication centre 7 checks the validity of the PIN and authenticity of the visitor node and if it is satisfied then the attach process is allowed to continue. An authentication process, similar to that found in mobile



communications systems, may be optionally included if the selected telephone 14 is configured to receive a smart card (Step S13).

The authentication centre 7 sends an authorisation code to the reference profile register 5 which permits the register 5 to be modified and user data to be sent to the visitor node 9 .

5 The authentication centre 7 informs the visitor node 9 that the authorisation process was successful (as shown by arrow C) (Step S14). The current profile register 10, located in the visitor node 9, requests user data from the reference profile register 5, located in the home node 4 (Step S15). The reference profile register 5 stores the location of the visitor node 9, for re-routing calls to the visited network 2 and sends the requested user data to the current  
10 profile register 10 (Step S16). The current profile register 10 stores the requested data and the location of the home node 4, for sending billing information. The current profile register 10 assigns a routing number to the selected telephone 14 and issues the user with a temporary short code (TSI) (as shown by arrow D) (Step S18). The temporary short code is a number which enables the user to make calls using any telephone within the visited  
15 network 2. This process is discussed later.

The user 3 is now attached to the visited network 2 and is in a position to receive calls made to his personal number, provided though his home service provider, and to make calls, provided though the visited service provider.

A user-terminated call process will now be described.

20 Referring to Figure 5, a second party 15 dials the user's personal number, using a home network telephone 16 located in the home network 1. In this example, the call is received by a second home network exchange 17. The second home network exchange 17 recognises the number as being a personal number and routes the call to the home node 4. On receiving the call, the home node 4 carries out a service control process. Examples of  
25 service control processes include unconditional call-forwarding, time-of-day call-forwarding and call screening. The reference profile register 5 determines where the call is to be routed, whether to a voice mail server or to the visitor node 4, as a consequence of the service control process. If the call is to be forwarded, the reference profile register 5 looks up the location of the visitor node 9 and sends a request for the routing number of the

selected telephone 14 from the current profile register 10. The current profile register 10 returns a routing number to the reference profile register 5, which in turn sends the routing number to the second home network exchange 17 to enable the call to be set-up.

5 The home node 4 and the visitor node 9 are configured so as to apportion the cost of the call fairly between the second party 15 and the user 3. In this example, the second party 15 only pays for the portion of the routed call within the home network 2, while the user 3 pays for remainder of the call. User billing data, accrued while the user 3 is in the visited network 2 is held in the Current Profile Register 10.

A user-originating call process will now be described.

10 Referring to Figure 6, the user 3 wishes to contact a third party 18 located at a destination telephone 19, connected to the home network 1. The user 3 dials a composite number, comprising a prefix number which is the temporary short code and a suffix number which is the number of the destination telephone number 19. In this example, the user 3 makes the call using the selected telephone 14. However he would be free to use any telephone  
15 connected to the visited network 2. The call is received by a second visited network exchange 20, which identifies the call as one being made by a visitor to the network, by the prefix number. The second visited network exchange 20, sends a call set-up request to the visitor node 9. In the visitor node 9, the current profile register 10 checks the validity of the temporary short code. In this example, the current profile register 10 also checks  
20 whether the destination number is barred. If the temporary short code is valid and the call destination is cleared, the current profile register 10, sends a clearance message to the second visited network exchange 20, which routes the call to the destination number via a third local home network exchange 21.

25 The visitor node 9 is configured to charge the user 3 for the cost of call at a premium rate with the billing data held in the Current Profile Register 10.

The detach process will now be described.

Referring to Figures 7 and 8, the user 3 dials the universal access number on any telephone connected to the visited network 2 (Step S19). In this example, the user 3 make the call on

the user-selected telephone 14. This number is recognised by the third visited network exchange 22 and routed to the visitor node 9 (Step S20).

The visitor node 9 prompts the user 3 whether he wishes to "attach" to or "detach" from the visited network 2 by entering "1" or "3" respectively (Step S21). The user 3 enters "3" on the touch-tone pad of the selected telephone 14, to indicate that he wishes to "detach" (Step S22).

The visitor node 9 prompts the user 3 to enter his PIN, which the user 3 does using the touch-tone pad of the selected telephone 14 (Steps S23, S24). No authentication of the PIN is carried out in this example, because the detach process serves to cut-off use of the visited network 2 and so it is less like to be open to abuse by an unauthorised person.

The current profile register 10 sends to the reference profile register 5, a detach request (Step S25). The reference profile register 5 deletes the temporary profile held on the visitor node 9 and returns a confirmation of deletion to the current profile register 10. The reference profile register 5 also sends a request for billing information to the current profile register 10 (Step S26). The current profile register 10 sends the billing information to the reference profile register 5 (Step S27) and plays a confirmation message to the user 3 stating that he is now detached and that billing information has been forwarded to his home service provider. Finally, the current profile register 10 deletes the temporary short code so that the user 3 is no longer able to make calls from the visited network (Step S28).

The user 3 is no longer attached to the visited network 2. Unless he re-attaches himself, calls made to the user's personal number will be forwarded to a voice mail server.

It will be appreciated that many modifications may be made to the embodiment described above.

For example, when a user-terminated call is made, the selected telephone 14 rings with a different cadence to normal, so to indicate that the incoming call is meant for the user 3 rather than the usual recipient.

Many users may select the same telephone for call-forwarding. Each user may be assigned a different ring to distinguish between them.

Authentication can be carried out by placing next to the handset a personal organiser having a microphone and a speaker and running a dual-tone modulation frequency (DTMF) generator program with which tones carrying authentication numbers may be received, generated and sent.

Whilst the described examples make use of PSTNs for the networks 1, 2, it will be understood that other wired networks could be employed, which may include radio links and optical converters.

## Claims

1. A method of providing a user of a home network with use of a visited network, the method comprising registering the user with the visited network, including supplying a visitor node which is located in the visited network with the identity of a user-selected terminal and a first identification number for identifying the user and a home node  
5 which is located in the home network, and registering the visitor node as a proxy with the home node so as to allow routing by the home node of a call intended for the user to the user-selected terminal.
2. A method of configuring a home network to provide a user of the home network,  
10 who is assigned a user number, use of a visited network, the method comprising receiving, from a visitor node located in the foreign network, its identity; storing and associating the identity of the visitor node with the user number and receiving billing data from the visitor node for charging the user.
3. A method of configuring a visitor node to provide a user of a home network use  
15 of a visited network in which the visited node is located, the method comprising receiving an identification number for identifying the user and a home node which is located in the home network, requesting and receiving confirmation of registration with the home node and sending to the home node billing data arising from the user's use of the visited network.
- 20 4. A method according to claim 1 or 3 wherein the visitor node comprises a visitor switching means and a visitor location database.
5. A method according to either claim 1, 2, 3, or 4 wherein the user-selected terminal is assigned a temporary routing number.
6. A method according to any preceding claim further providing a further user of  
25 the home network with use of the visited network, wherein a call intended for the further user is routed to the user-selected terminal.
7. A method according to any preceding claim wherein the visited network is a public switched telephone network and including supplying a visitor node with the

identity of a user-selected terminal comprising providing the telephone number of a terminal attached to the visited network.

8. A method according to any preceding claim further comprising supplying the user with a second identification number for enabling the user to use the visited network and for enabling the visitor node to record the use of the visited network by the user.
9. A method according to claim 8 wherein in order to enable the user to use the visited network the user dials the second identification number and a destination terminal number for making a call to the destination terminal.
10. A method according to either claim 8 or 9 wherein the recorded use of the visited network is supplied to the home node for the purposes of billing.
11. Apparatus for providing a user of a home network with use of a visited network, comprising a visited network and a home network, a user-selected terminal connected to the visited network; means for registering the user with the visited network, a visitor node located in the visited network, means for supplying the visitor node with the identity of the user-selected terminal and a first identification number for identifying the user; a home node located in the home network, and means for registering the visitor node as a proxy with the home node so as to allow routing by the home node of a call intended for the user to the user-selected terminal.
12. A telephone network configurable as a home network to provide a user of the home network, who is assigned a user number, use of a visited network, the network comprising means for receiving, from a visitor node located in another network, its identity; means for storing and associating the identity of the visitor node with the user number; and means for receiving billing data from the visitor node for charging the user.
13. A node in a telephone network configurable as a visited node to provide a user of another, home, network use of the network in which the visited node is located, the node comprising means for receiving an identification number for identifying the user and a home node located in the home network, means for requesting and receiving

confirmation of registration with the home node and means for sending to the home node billing data arising from the user's use of the visited network.

14. Apparatus according to claim 11 or 13 wherein the visitor node comprises a visitor switching means and a visitor location database.

5 15. Apparatus according to any of claims 11, 13 or 14 wherein the visited network is a public switched telephone network and includes means for supplying the visitor node with the identity of a user-selected terminal by providing the telephone number of a terminal attached to the visited network.

10 16. Apparatus according to claim 11, 12, 13, 14 or 15 comprising means for assigning the user-selected terminal is assigned a temporary routing number.

17. Apparatus according to any of claims 11 to 16 having means for providing a further user of the home network with use of the visited network, comprising means for allowing calls intended for the further user is routed to the user-selected terminal.

15 18. Apparatus according to any of claims 11 to 17 further comprising means for supplying the user with a second identification number for enabling the user to use the visited network, and means for enabling the visitor node to record the use of the visited network by the user.

20 19. Apparatus according to claim 18 comprising means to enable a user to use the visited network, comprising means for receiving dialled data indicative of the second identification number and the destination terminal number.

20. Apparatus according to either claim 18 or 19 comprising means for transmitting recorded use of the visited network to the home node from the visited node for the purposes of billing.

25 21. A method substantially as herein described with reference to Figures 1 to 8 of the accompanying drawings

1/6

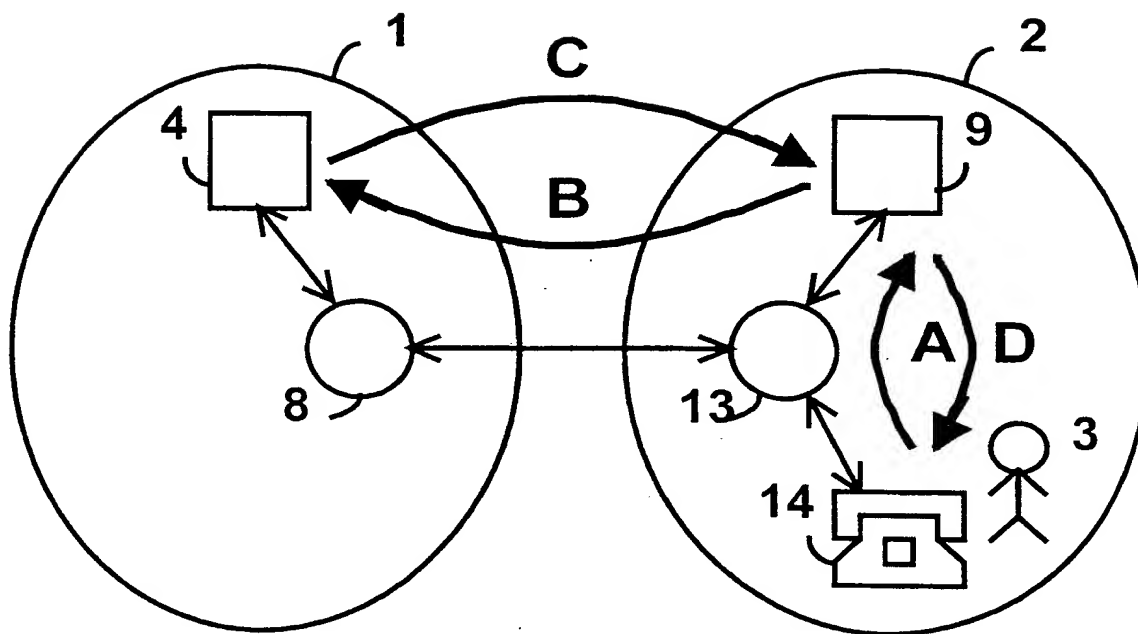


Figure 1

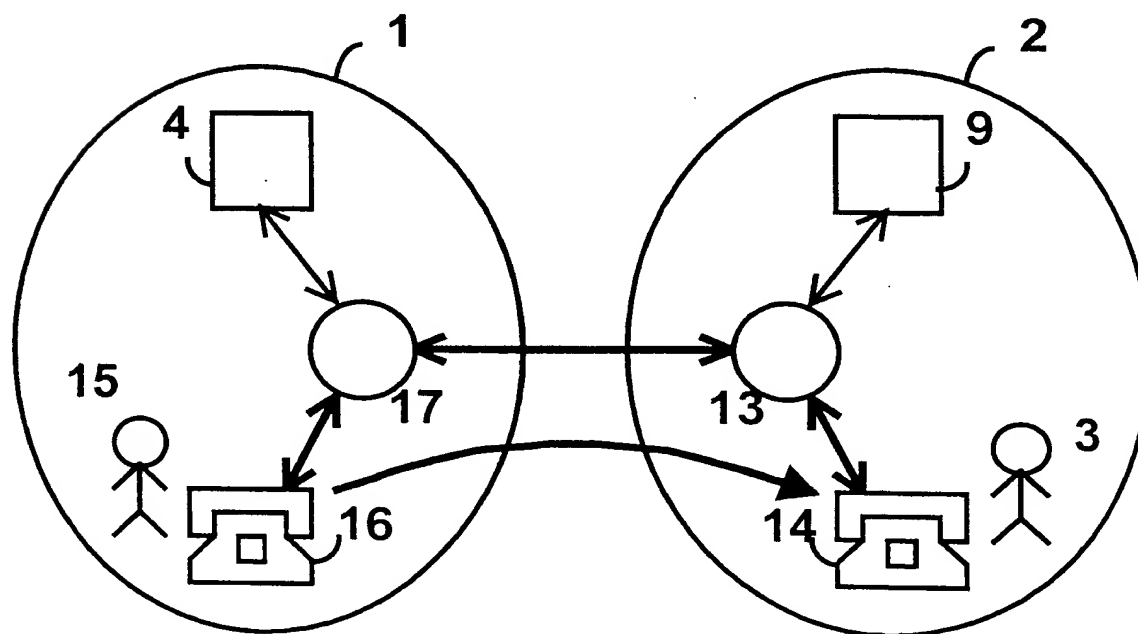


Figure 5



2/6

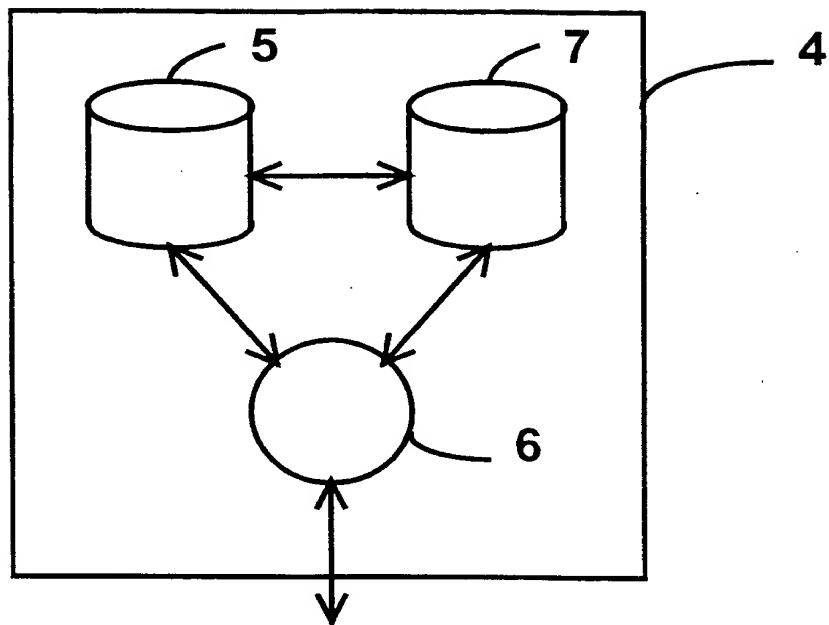


Figure 2

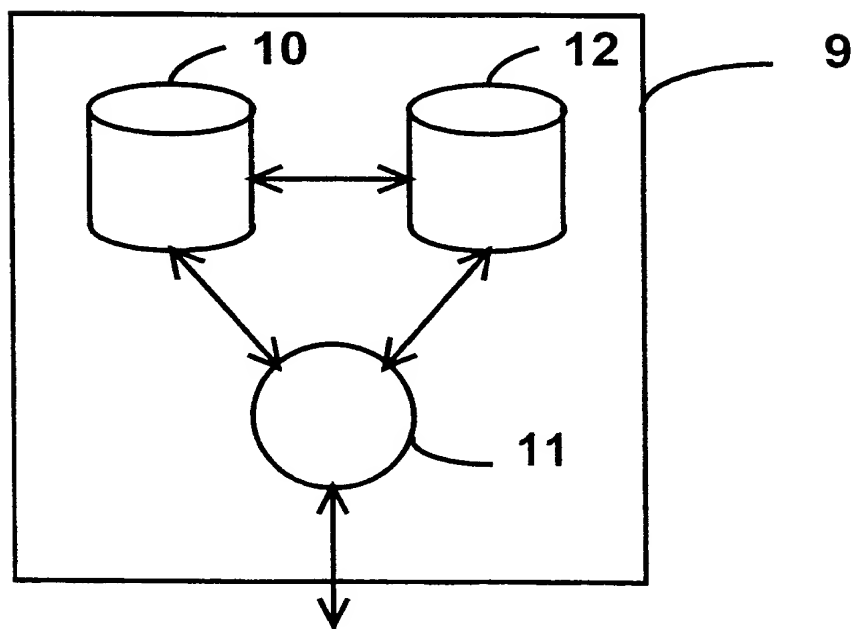
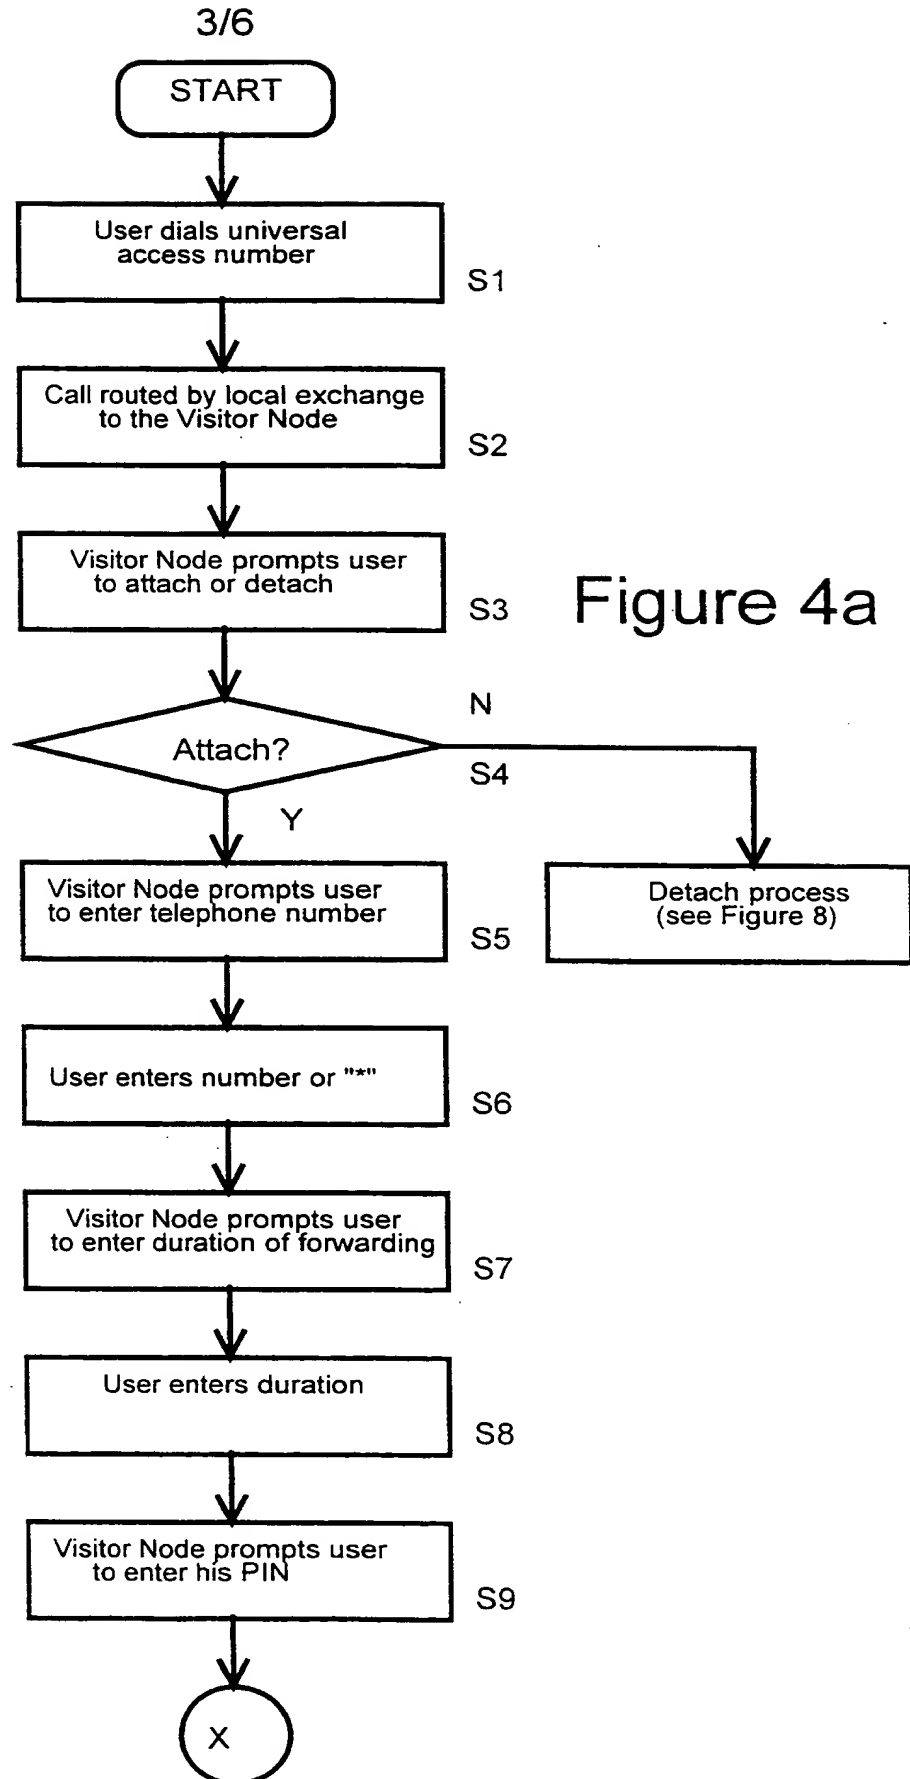


Figure 3



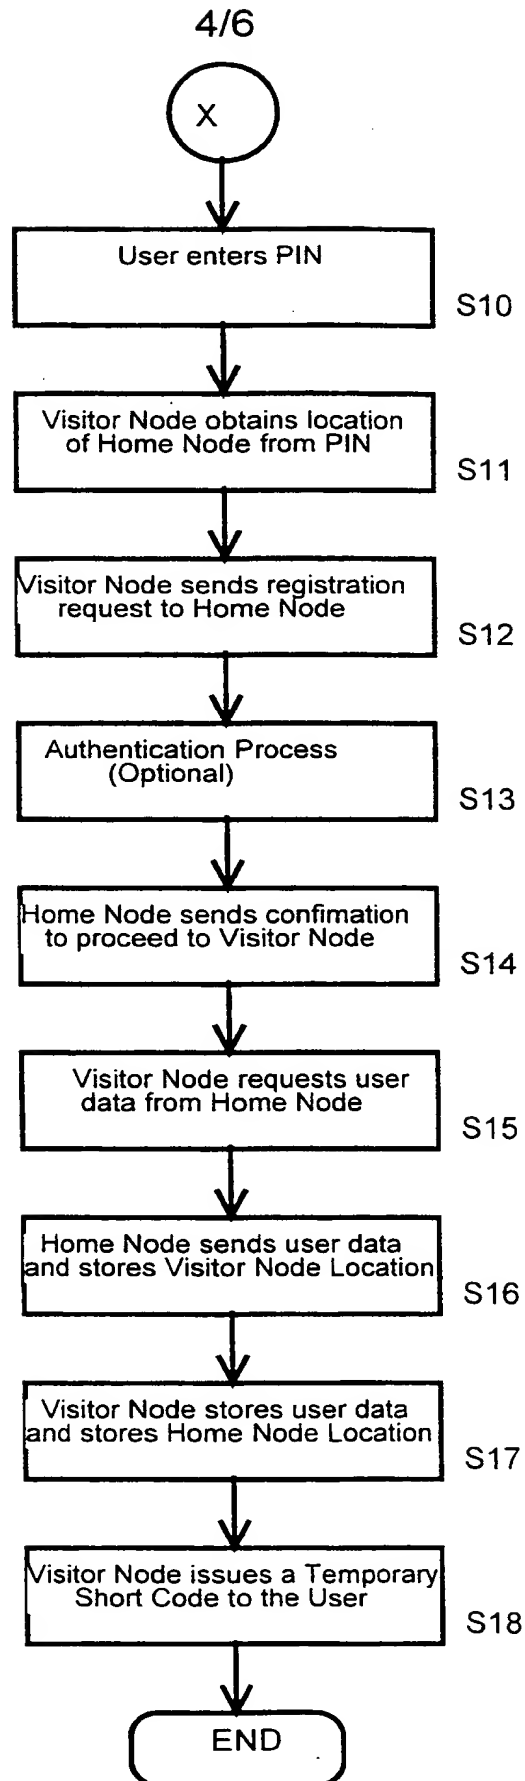


Figure 4b

5/6

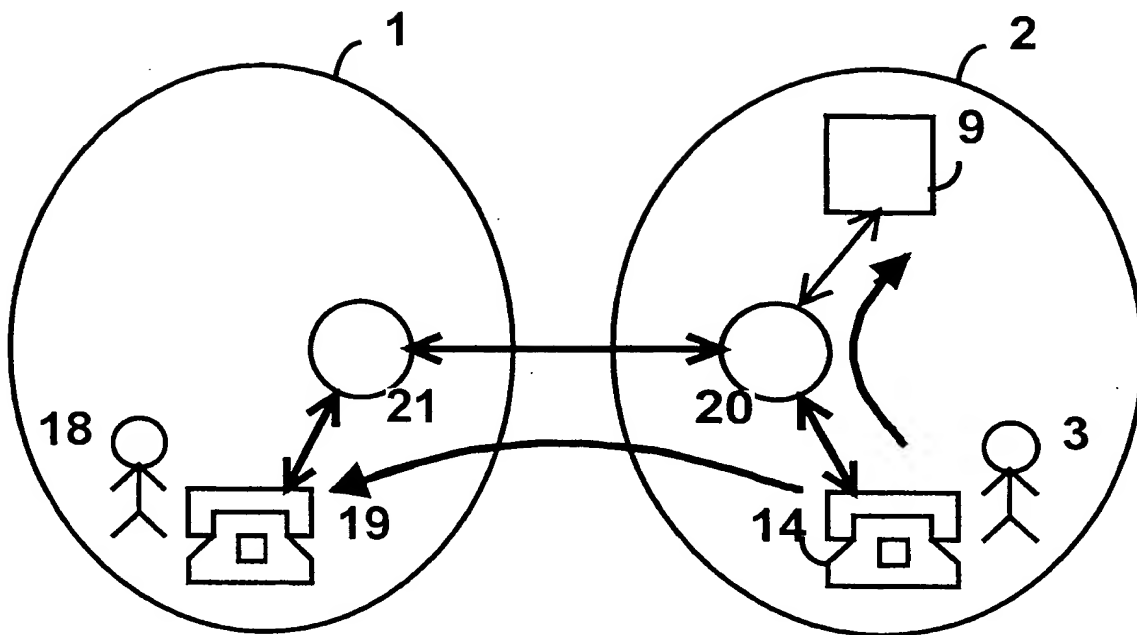


Figure 6


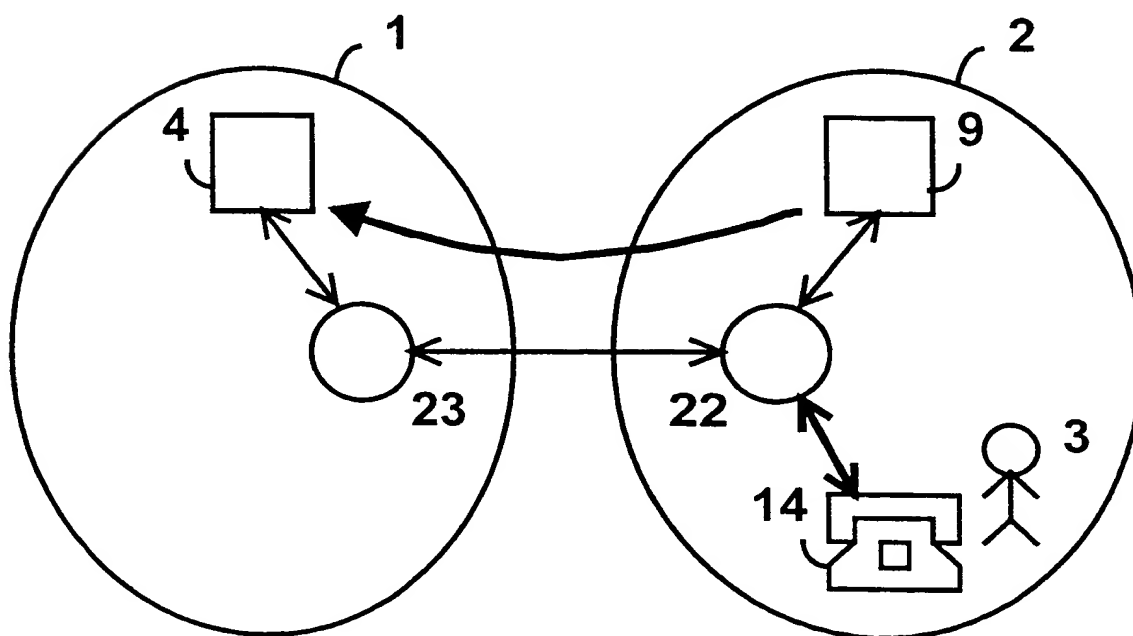


Figure 7

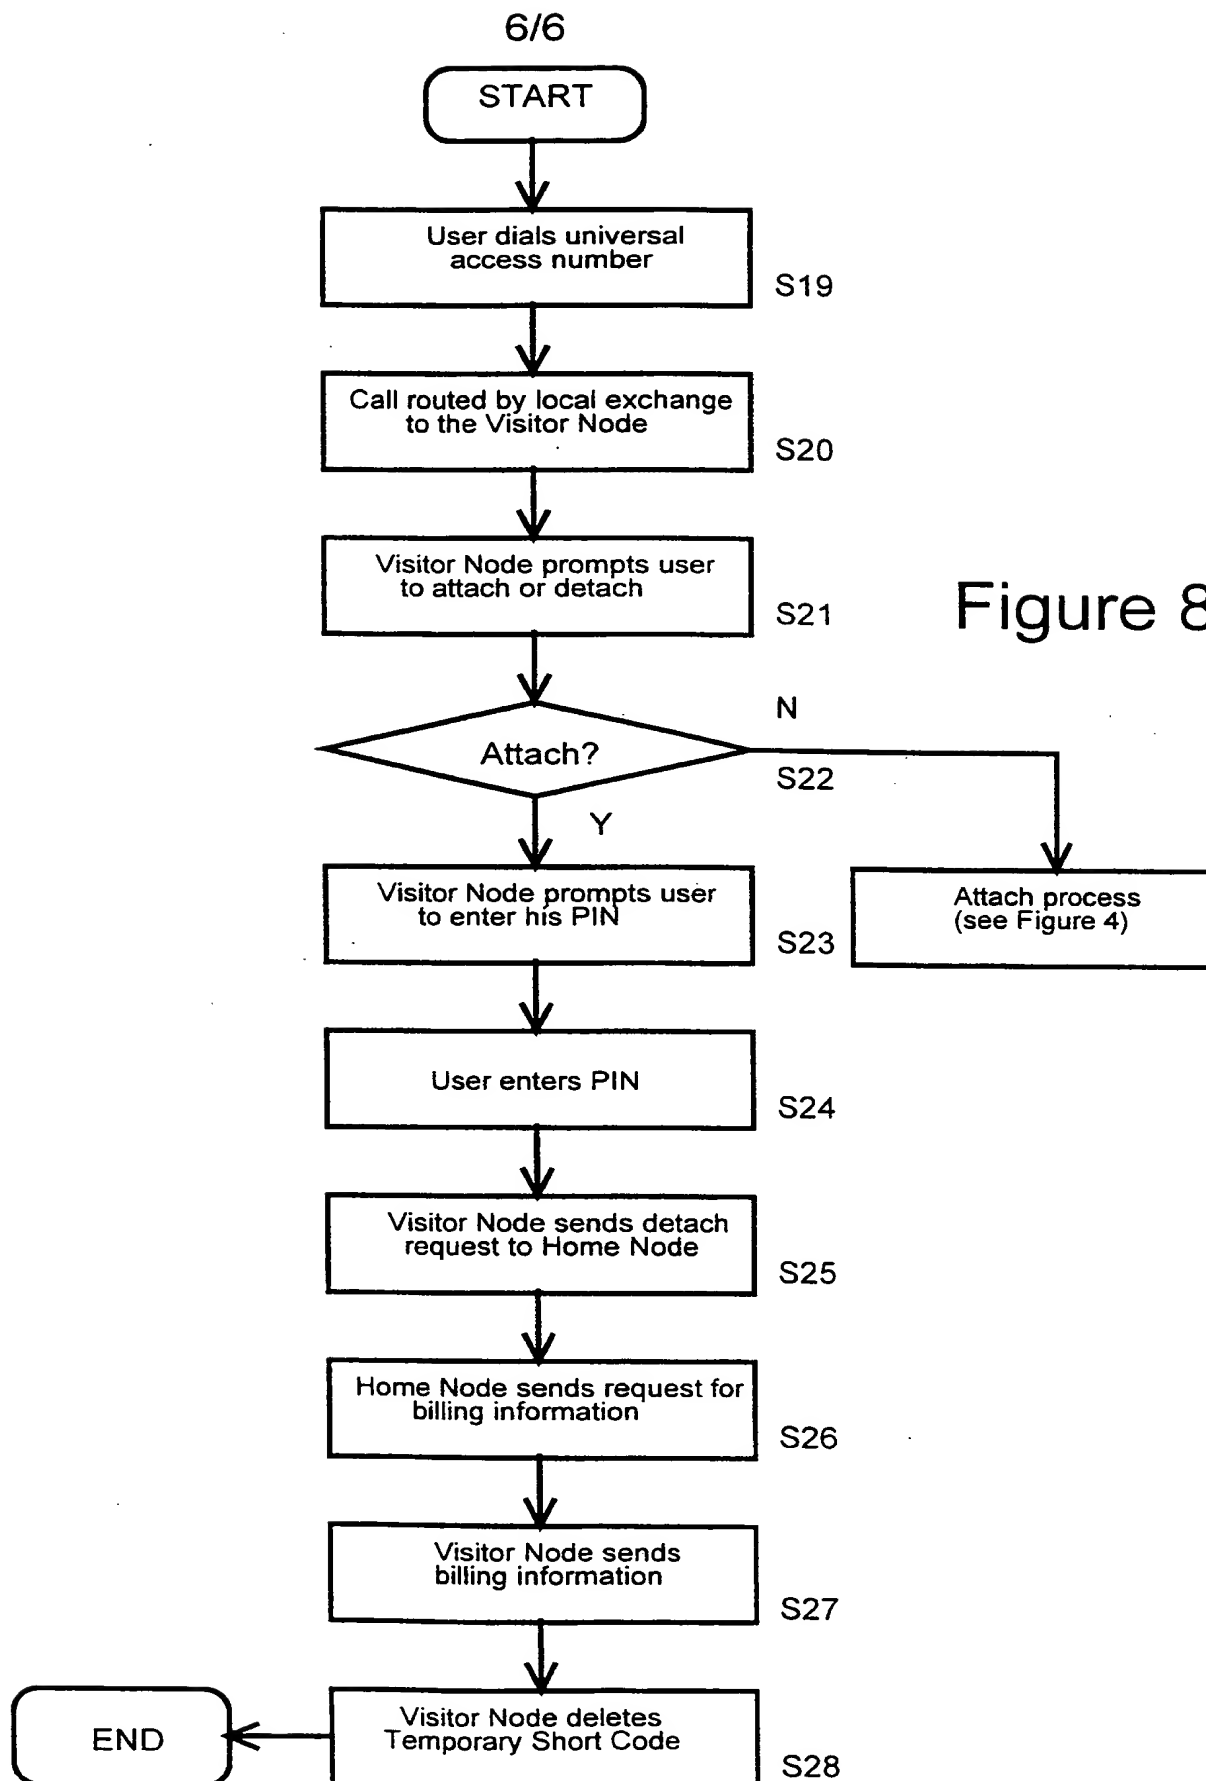

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 00/00818

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04M3/42 H04M3/54

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 577 110 A (AQUINO MARINO K) 19 November 1996 (1996-11-19)  column 1, line 34 -column 2, line 44 figure 1  ---	1-3,7,8, 11-13, 15,18
A	US 5 537 467 A (CHENG ET AL) 16 July 1996 (1996-07-16) column 3, line 31 -column 4, line 60  ---	1-20
A	US 4 899 373 A (LEE CHINMEI C ET AL) 6 February 1990 (1990-02-06) column 1, line 36 - line 55 claims 2,3,5-7  ---	1-20
A	US 5 353 331 A (EMERY ET AL) 4 October 1994 (1994-10-04) abstract  -----	1-20

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

18 April 2000

Date of mailing of the international search report

28/04/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Patlaka, E.

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 00/00818

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5577110 A	19-11-1996	CA 2114273 A,C	27-10-1994
		CN 1100864 A	29-03-1995
		EP 0622936 A	02-11-1994
		JP 6334755 A	02-12-1994
		SG 46204 A	20-02-1998
US 5537467 A	16-07-1996	CA 2198215 A	29-02-1996
		EP 0777944 A	11-06-1997
		JP 2952306 B	27-09-1999
		JP 9510851 T	28-10-1997
		WO 9606498 A	29-02-1996
US 4899373 A	06-02-1990	CA 1277791 A	11-12-1990
		GB 2198011 A,B	02-06-1988
		JP 1712621 C	27-11-1992
		JP 3079907 B	20-12-1991
		JP 63151156 A	23-06-1988
US 5353331 A	04-10-1994	WO 9318606 A	16-09-1993
		US 5469496 A	21-11-1995
		US 5579379 A	26-11-1996
		US 5506887 A	09-04-1996
		US 5664005 A	02-09-1997
		US 5610972 A	11-03-1997
		US 5758281 A	26-05-1998
		US 6011975 A	04-01-2000